


These Bimetallic cable Lugs are manufactured out of Aluminium Tubes of E.C . Grade having conductivity of 60% I.A.C.S. as per IS 5082. These Aluminum Lugs are Fused with E.C. Grade Copper Bushes by fusion process. The bimetallic Surface is sealed with special Green colour anti-galvanic compound for preventing bimetallic galvanic electro corrosion. The barrel of the lug is filled with corrosion inhibiting compound and are supplied with PVC cap.

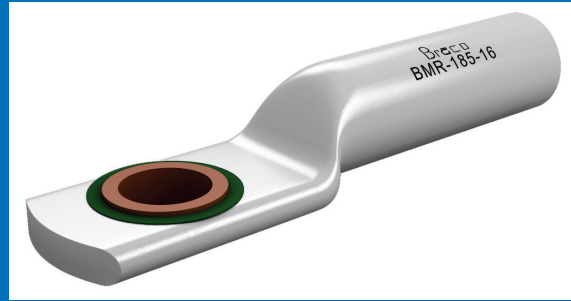

Bimetallic Terminals - Copper Ring Type

Material : Aluminium 99.5, E Copper

Surface : Bright

"Size Sq.mm."	E	A	C	D	G	H	L	J	Cat No.
150	13	16.5	26	35	18.5	21.5	103	121	BMR-150-12
185	13	18.5	28	40	22	22.5	106	128	BMR-185-12
	17	18.5	28	40	22	22.5	106	128	BMR-185-16
300	13	23.5	33	51	24.5	24.5	124	148	BMR-300-12
	17	23.5	33	51	24.5	24.5	124	148	BMR-300-16
	21	23.5	33	51	24.5	24.5	124	148	BMR-300-20

