


Braco Bi-metallic terminals for aluminium conductor are manufactured from solid materials by friction welding. This method means that aluminium and Copper join through the heat, which develops when aluminium rotates against copper under pressure. This is a superior method to give a complete connection between Aluminium and Copper. Barrels are capped and filled with grease so as to avoid oxidation of the aluminium.

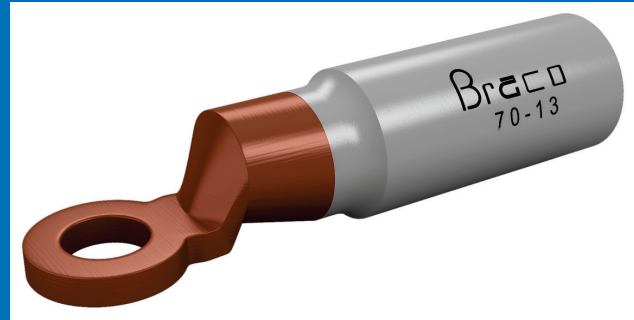

BI-METALLIC TERMINALS

Material : Aluminium 99.5, E Copper
Surface : Bright

SIZE Sq.mm.	Dimension						CAT NO.
	E	A	C	D	B	J	
16	10.5	5.5	16	24	42	90	BMT-16-10
	13	5.5	16	24	42	90	BMT-16-12
25	10.5	6.5	16	24	42	90	BMT-25-10
	13	6.5	16	24	42	90	BMT-25-12
35	10.5	8	16	24	42	90	BMT-35-10
	13	8	16	24	42	90	BMT-35-12
50	10.5	9.5	20	24	43	92	BMT-50-10
	13	9.5	20	24	43	92	BMT-50-12
70	10.5	11.5	20	24	43	92	BMT-70-10
	13	11.5	20	24	43	92	BMT-70-12
95	13	13.5	20	24	43	92	BMT-95-12
120	13	15	25	30	60	117	BMT-120-12
150	13	16.5	25	30	60	117	BMT-150-12
	17	16.5	25	30	60	117	BMT-150-16
185	13	18.5	32	35	60	124	BMT-185-12
	17	18.5	32	35	60	124	BMT-185-16
240	13	21	32	35	60	124	BMT-240-12
	17	21	32	35	60	124	BMT-240-16
300	13	22.5	34	36	62	130	BMT-300-12
	17	22.5	34	36	62	130	BMT-300-16
400	13	27	40	36	80	152	BMT-400-12
	17	27	40	36	80	152	BMT-400-16
500	13	30	40	36	80	152	BMT-500-12
630	13	34	46	36	70	146	BMT-630-12
	21	34	46	36	70	146	BMT-630-20
800	13	39	54	50	115	230	BMT-800-12
1000	13	43	58	50	115	230	BMT-1000-12

